

EMC TEST REPORT
For
Shenzhen XinShengLi Power Co.,LTD.

Battery Charger

Model No.: Lii-202,Lii-201,C20

Prepared for : Shenzhen XinShengLi Power Co.,LTD.
Address : (MaoBang Industrial park)6th Floor,No.8,Lingwu industrial zone,
Junzibu,Guanlan town, Shenzhen,Guangdong,China

Prepared by : Shenzhen STONG Compliance Testing Laboratory Co.,Ltd.
Address : F/4, Building 10, Da Yuan Industrial Zone, Xili Town, Nanshan
District, Shenzhen, Guangdong, China
Web : www.stong-cert.com
Mail : stong@stong-cert.com

Date of receipt of test sample : Aug 08, 2016
Number of tested samples : 1
Serial number : Prototype
Date of Test : Aug 08, 2016 - Aug 12, 2016
Date of Report : Aug 12, 2016



EMC TEST REPORT

EN 55022: 2010

Information technology equipment-Radio disturbance characteristics-Limits of measurement

EN 55024: 2010

Information technology equipment-Immunity characteristics-Limits and methods of measurement of measurement

Report Reference No.: R20160808385E

Date Of Issue.....: Aug 12, 2016

Testing Laboratory Name.....: Shenzhen STONG Compliance Testing Laboratory Co.,Ltd.

Address: F/4, Building 10, Da Yuan Industrial Zone, Xili Town, Nanshan District, Shenzhen, Guangdong, China

Testing Location/ Procedure: Full application of Harmonised standards
 Partial application of Harmonised standards
 Other standard testing method

Applicant's Name: Shenzhen XinShengLi Power Co.,LTD.

Address: (MaoBang Industrial park)6th Floor,No.8,Lingwu industrial zone,Junzibu,Guanlan town, Shenzhen,Guangdong,China

Test Specification:

Standard: EN 55022: 2010
 EN 55024: 2010

Test Report Form No.....: EMC-1.0

TRF Originator.....: Shenzhen STONG Compliance Testing Laboratory Co.,Ltd.

Master TRF.....: Dated 2015-03

SHENZHEN STONG COMPLIANCE TESTING LABORARY CO.,LTD. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the SHENZHEN STONG COMPLIANCE TESTING LABORARY CO.,LTD. is acknowledged as copyright owner and source of the material. SHENZHEN STONG COMPLIANCE TESTING LABORARY CO.,LTD. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description.....: Battery Charger

Trade Mark.....: LiitoKala® **XSL** 鑫威力® Colaier®

Model/ Type Reference.....: Lii-202

Ratings: Output:5V⁻⁻⁻ 1A

Result: Positive

Compiled by:

Si feifei



Supervised by:

Xie Lingling

Approved by:

Xu Peng

Si feifei / File administrators

Xie Lingling / Technique principal

Xu Peng / Manager

EMC -- TEST REPORT

Test Report No. : R20160808385E

Aug 12, 2016
Date of issue

Type/ Model..... : Lii-202

EUT..... : Battery Charger

Applicant..... : Shenzhen XinShengLi Power Co.,LTD.

Address..... : (MaoBang Industrial park)6th Floor,No.8,Lingwu industrial zone,Junzibu,Guanlan town, Shenzhen, Guangdong,China

Telephone..... : /

Fax..... : /

Manufacturer..... : Shenzhen XinShengLi Power Co.,LTD.

Address..... : (MaoBang Industrial park)6th Floor,No.8,Lingwu industrial zone,Junzibu,Guanlan town, Shenzhen, Guangdong,China

Telephone..... : /

Fax..... : /

Factory..... : Shenzhen XinShengLi Power Co.,LTD.

Address..... : (MaoBang Industrial park)6th Floor,No.8,Lingwu industrial zone,Junzibu,Guanlan town, Shenzhen, Guangdong,China

Telephone..... : /

Fax..... : /

Test Result according to the standards on page 7: Positive

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

TABLE OF CONTENT

Test Report Description	Page
1. SUMMARY OF STANDARDS AND RESULTS	6
1.1.Description of Standards and Results	6
1.2.Description of Performance Criteria	7
2. GENERAL INFORMATION	8
2.1.Description of Device (EUT)	8
2.2.Description of Test Facility	8
2.3.Statement of the measurement uncertainty	8
2.4.Measurement Uncertainty	8
3. MEASURING DEVICE AND TEST EQUIPMENT	9
3.1. Conducted Disturbance	9
3.2.Disturbance Power	9
3.3.Radiated Electromagnetic Disturbance	9
3.4.Radiated Disturbance (Electric Field)	9
3.5.Harmonic Current	9
3.6.Voltage fluctuation and Flicker	9
3.7.Electrostatic Discharge	10
3.8.RF Field Strength Susceptibility	10
3.9.Electrical Fast Transient/Burst	10
3.10.Surge	10
3.11.Conducted Susceptibility	10
3.12.Power Frequency Magnetic Field Susceptibility	10
3.13.Voltage Dips	11
3.14.Voltage Short Interruptions	11
4. POWER LINE CONDUCTED EMISSION MEASUREMENT	12
4.1.Block Diagram of Test Setup	12
4.2.Test Standard	12
4.3.EUT Configuration on Test	12
4.4.Operating Condition of EUT	12
4.5.Test Procedure	13
4.6.Test Results	13
5. RADIATED EMISSION MEASUREMENT	15
5.1.Block Diagram of Test Setup	15
5.2.Measuring Standard	15
5.3.Radiated Emission Limits	15
5.4.EUT Configuration on Test	16
5.5.Operating Condition of EUT	16
5.6.Test Procedure	16
5.7.Test Results	16
6. HARMONIC CURRENT EMISSION MEASUREMENT	18
6.1.Block Diagram of Test Setup	18
6.2.Test Standard	18
6.3.Operation Condition of EUT	18
6.4.Test Results	18
7. VOLTAGE FLUCTUATION AND FLICKER MEASUREMENT	19
7.1.Block Diagram of Test Setup	19
7.2.Measuring Standard	19
7.3.Operation Condition of EUT	19
7.4.Test Results	19
8. ELECTROSTATIC DISCHARGE IMMUNITY TEST	21
8.1.Block Diagram of Test Setup	21
8.2.Test Standard	21
8.3.Severity Levels and Performance Criterion	21

8.4.EUT Configuration on Test	21
8.5.Operating Condition of EUT	21
8.6.Test Procedure	22
8.7.Test Results.....	22
9. RF FIELD STRENGTH SUSCEPTIBILITY TEST.....	24
9.1.Block Diagram of Test	24
9.2.Test Standard	24
9.3.Severity Levels and Performance Criterion.....	24
9.4.EUT Configuration on Test	25
9.5.Operating Condition of EUT.....	25
9.6.Test Procedure	25
9.7.Test Results.....	25
10. ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST	27
10.1.Block Diagram of Test Setup	27
10.2.Test Standard	27
10.3.Severity Levels and Performance Criterion.....	27
10.4.EUT Configuration on Test	27
10.5.Operating Condition of EUT.....	27
10.6.Test Procedure	28
10.7.Test Results.....	28
11. SURGE IMMUNITY TEST.....	30
11.1.Block Diagram of Test Setup	30
11.2.Test Standard	30
11.3.Severity Levels and Performance Criterion	30
11.4.EUT Configuration on Test	30
11.5.Operating Condition of EUT.....	30
11.6.Test Procedure	31
11.7.Test Results.....	31
12. INJECTED CURRENTS SUSCEPTIBILITY TEST	33
12.1.Block Diagram of Test Setup	33
12.2.Test Standard	33
12.3.Severity Levels and Performance Criterion.....	33
12.4.EUT Configuration on Test	33
12.5.Operating Condition of EUT.....	33
12.6.Test Procedure	34
12.7.Test Results.....	34
13. MAGNETIC FIELD SUSCEPTIBILITY TEST.....	36
13.1.Block Diagram of Test Setup	36
13.2.Test Standard	36
13.3.Severity Levels and Performance Criterion.....	36
13.4.EUT Configuration on Test	36
13.5.Test Procedure	37
13.6.Test Results.....	37
14. VOLTAGE DIPS AND INTERRUPTIONS TEST	39
14.1.Block Diagram of Test Setup	39
14.2.Test Standard	39
14.3.Severity Levels and Performance Criterion.....	39
14.4.EUT Configuration on Test	39
14.5.Operating Condition of EUT.....	39
14.6.Test Procedure	40
14.7.Test Results.....	40
15. PHOTOGRAPH	42
15.1.Photo of Radiated Measurement	42
16. EXTERNAL AND INTERNAL PHOTOS OF THE EUT.....	43
17. MANUFACTURER/ APPROVAL HOLDER DECLARATION.....	47

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION (EN 55022: 2010)			
Description of Test Item	Standard	Limits	Results
Conducted disturbance at mains terminals	EN 55022: 2010	Class B	PASS
Conducted disturbance at telecommunication port	EN 55022: 2010	Class B	N/A
Radiated disturbance	EN 55022: 2010	Class B	PASS
Harmonic current emissions	EN 61000-3-2: 2006+A1: 2009+A2: 2009	Class A	PASS
Voltage fluctuations & flicker	EN 61000-3-3: 2013	-----	PASS
IMMUNITY (EN 55024: 2010)			
Description of Test Item	Basic Standard	Performance Criteria	Results
Electrostatic discharge (ESD)	EN 61000-4-2: 2009	B	PASS
Radio-frequency, Continuous radiated disturbance	EN 61000-4-3: 2006+A2: 2010	A	PASS
Electrical fast transient (EFT)	EN 61000-4-4: 2004+A1: 2010	B	PASS
Surge (Input a.c. power ports)	EN 61000-4-5: 2006	B	PASS
Surge (Telecommunication ports)		B	N/A
Radio-frequency, Continuous conducted disturbance	EN 61000-4-6: 2009	A	PASS
Power frequency magnetic field	EN 61000-4-8: 2010	A	PASS
Voltage dips, >95% reduction	EN 61000-4-11: 2004	B	PASS
Voltage dips, 30% reduction		C	PASS
Voltage interruptions		C	PASS
N/A is an abbreviation for Not Applicable.			

1.2.Description of Performance Criteria

General Performance Criteria

Examples of functions defined by the manufacturer to be evaluated during testing include, but are not limited to, the following:

- essential operational modes and states;
- tests of all peripheral access (hard disks, floppy disks, printers, keyboard, mouse, etc.);
- quality of software execution;
- quality of data display and transmission;
- quality of speech transmission.

1.2.1.Performance criterion A

The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacture when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

1.2.2.Performance criterion B

After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacture, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance.

During the test, degradation of performance is allowed. However, no change of operation state or stored data is allowed to persist after the test.

If the minimum performance level (or the permissible performance loss) is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

1.2.3.Performance criterion C

Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacture's instructions.

Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

EUT : Battery Charger

Model Number : Lii-202

Power Supply : Output:5V $\overline{\text{---}}$ 1A

EUT Clock Frequency : $\leq 108\text{MHz}$

2.2. Description of Test Facility

Site Description

Test Lab. : Shenzhen STONG Compliance Testing Laboratory Co.,Ltd.
 Add. : F/4, Building 10, Da Yuan Industrial Zone, Xili Town, Nanshan District, Shenzhen, Guangdong, China.
 Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

2.3. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the STONG quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

2.4. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Radiation Uncertainty :	30MHz~200MHz	$\pm 2.96\text{dB}$	(1)
	200MHz~1000MHz	$\pm 3.10\text{dB}$	(1)
Conduction Uncertainty :	150kHz~30MHz	$\pm 1.63\text{dB}$	(1)
Power disturbance :	30MHz~300MHz	$\pm 1.60\text{dB}$	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3. MEASURING DEVICE AND TEST EQUIPMENT

3.1. Conducted Disturbance

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	101142	2016/06/18
2	EMI Test Receiver	ROHDE & SCHWARZ	ESPI	101840	2016/06/18
3	Artificial Mains	ROHDE & SCHWARZ	ENV216	101288	2016/06/18
4	EMI Test Software	AUDIX	E3	N/A	2016/06/18

3.2. Disturbance Power

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	101142	2016/06/18
2	EMI Test Receiver	ROHDE & SCHWARZ	ESPI	101840	2016/06/18
3	Absorbing clamp	ROHDE & SCHWARZ	MDS 21	4033	2016/06/19
4	EMI Test Software	AUDIX	E3	N/A	2016/06/18

3.3. Radiated Electromagnetic Disturbance

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	101142	2016/06/18
2	Triple-loop Antenna	EVERFINE	LLA-2	11050003	2016/06/18
3	EMI Test Receiver	ROHDE & SCHWARZ	ESPI	101840	2016/06/18
4	EMI Test Software	AUDIX	E3	N/A	2016/06/18

3.4. Radiated Disturbance (Electric Field)

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	101142	2016/06/18
2	EMI Test Receiver	ROHDE & SCHWARZ	ESPI	101840	2016/06/18
3	Log per Antenna	SCHWARZBECK	VULB9163	9163-470	2015/06/21
4	Amplifier	Compliance Direction	PAP-0102	21001	2016/06/18
5	Spectrum Analyzer	Agilent	E4407B	MY41440754	2016/07/16
6	Horn Antenna	ETS.LINDGREN	3115	00034771	2015/12/11
7	EMI Test Software	AUDIX	E3	N/A	2016/06/18

3.5. Harmonic Current

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Power Analyzer Test System	Voltech	PM6000	20000670053	2016/06/18

3.6. Voltage fluctuation and Flicker

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Power Analyzer Test System	Voltech	PM6000	20000670053	2016/06/18

3.7.Electrostatic Discharge

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	ESD Simulator	KIKUSUI	KC001311	KES4021	2016/06/19

3.8.RF Field Strength Susceptibility

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	SIGNAL GENERATOR	HP	8648A	625U00573	2015/06/17
2	Amplifier	AR	500A100	17034	2016/06/18
3	Amplifier	AR	100W/1000M 1	17028	2016/06/18
4	Isotropic Field Monitor	AR	FM2000	16829	2016/06/18
5	Isotropic Field Probe	AR	FP2000	16755	2016/06/18
6	Bi-conic Antenna	EMCO	3108	9507-2534	2016/06/19
7	By-log-periodic Antenna	AR	AT1080	16812	2016/06/19
8	EMS Test Software	ROHDE & SCHWARZ	ESK1	N/A	2016/06/19

3.9.Electrical Fast Transient/Burst

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Electrical fast transient(EFT)generator	3CTEST	EFT-4021	EC0461044	2016/06/18
2	Coupling Clamp	3CTEST	EFTC	EC0441098	2016/06/18

3.10.Surge

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Surge test system	3CTEST	SG-5006G	EC5581070	2016/06/18
2	Coupling/decoupling network	3CTEST	SGN-5010G	ECS5591033	2016/06/18

3.11.Conducted Susceptibility

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Conducted Immunity Test System	FRANKONIA	CIT-10	126A1195	2016/06/18
2	Coupling/decoupling network	FRANKONIA	CDN-M2+M3	A2210177	2016/06/18

3.12.Power Frequency Magnetic Field Susceptibility

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Power frequency mag-field generator System	EVERFINE	EMS61000-8 K	906003	2016/06/18

3.13. Voltage Dips


Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Voltage dips and up generator	3CTEST	VDG-1105G	EC0171014	2016/06/18

3.14. Voltage Short Interruptions

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Voltage dips and up generator	3CTEST	VDG-1105G	EC0171014	2016/06/18

4. POWER LINE CONDUCTED EMISSION MEASUREMENT

4.1. Block Diagram of Test Setup

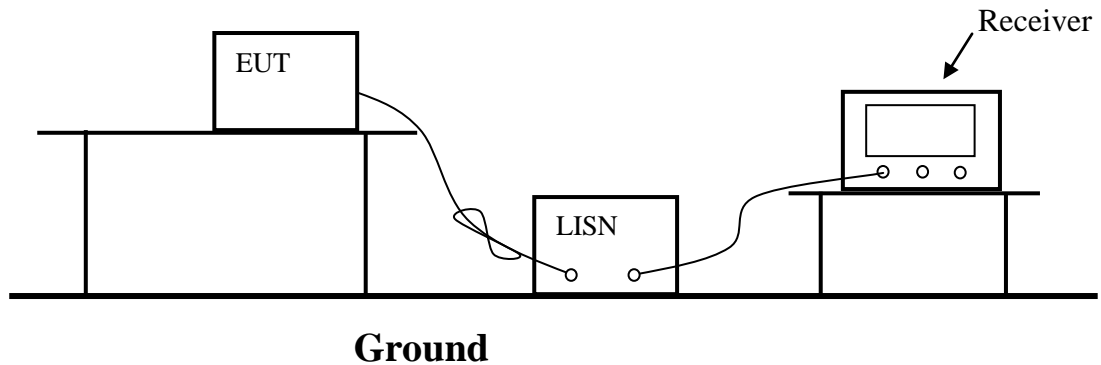

4.2. Test Standard

EN 55022: 2010

Power Line Conducted Emission Limits (Class B)

Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66.0 ~ 56.0 *	56.0 ~ 46.0 *
0.50 ~ 5.00	56.0	46.0
5.00 ~ 30.00	60.0	50.0

NOTE1-The lower limit shall apply at the transition frequencies.

NOTE2-The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

4.3. EUT Configuration on Test

The following equipments are installed on Conducted Emission Measurement to see EN 55022 requirements and operating in a manner which tends to maximize its emission characteristics in normal application.

4.4. Operating Condition of EUT

4.4.1. Setup the EUT as shown on Section 4.1.

4.4.2. Turn on the power of all equipments.

4.4.3. Let the EUT work in measuring mode (ON) and measure it.

4.5.Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and connected to the AC mains through Line Impedance Stability Network (L.I.S.N). This provided 50-ohm coupling impedance for the tested equipments. Both sides of AC line are investigated to find out the maximum conducted emission according to the EN 55022 regulations during conducted emission measurement.

The bandwidth of the field strength meter is set at 9kHz in 150kHz~30MHz.

The frequency range from 150kHz to 30MHz is investigated

4.6.Test Results

PASS.


The test result please refer to the next page.

Model No.	Lii-202	Test Date	Aug 09,2016
Environmental Conditions	24°C, 56% RH	Test Mode	ON
Pol	Line	Test Engineer	Kano

Model No.	Lii-202	Test Date	Aug 09,2016
Environmental Conditions	24°C, 56% RH	Test Mode	ON
Pol	Neutral	Test Engineer	Kano

5. RADIATED EMISSION MEASUREMENT

5.1. Block Diagram of Test Setup

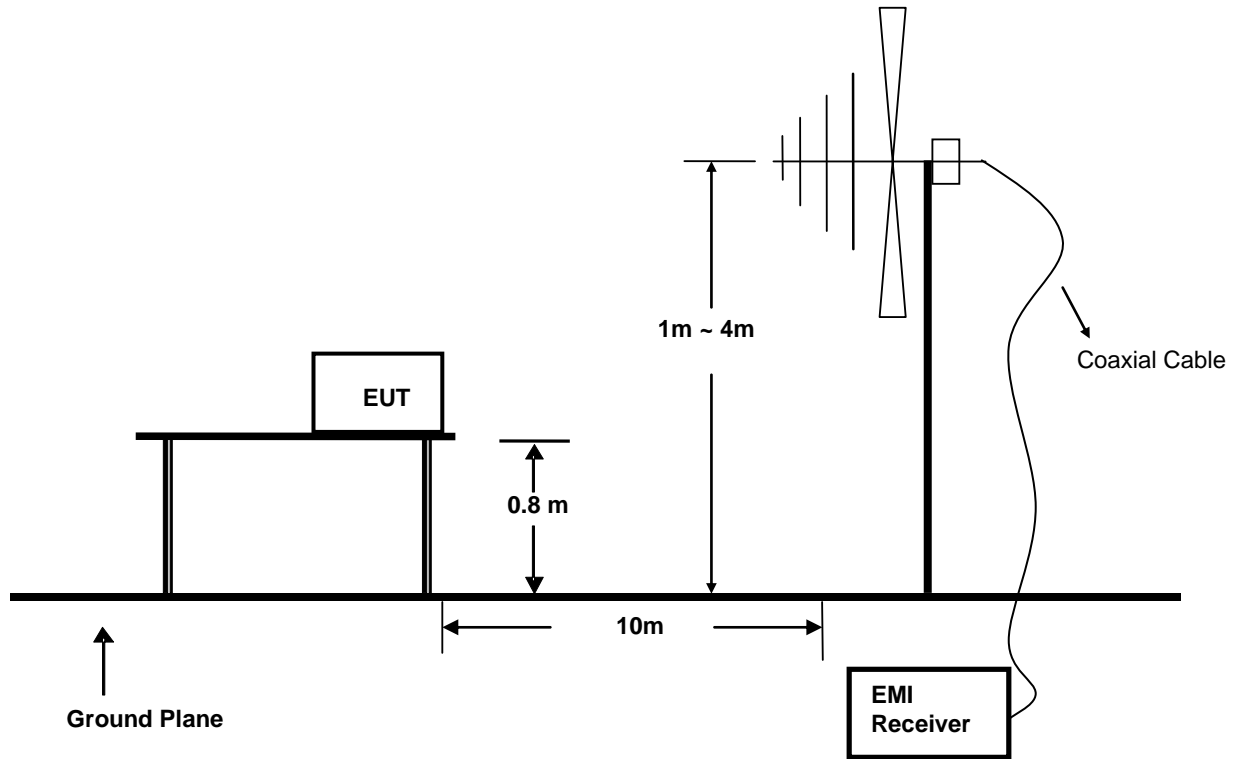

5.2. Measuring Standard

EN 55022: 2010

5.3. Radiated Emission Limits

EN 55022 Limits:

All emanations from a class B device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below:

Limits for radiated disturbance Blow 1GHz

FREQUENCY (MHz)	DISTANCE (Meters)	FIELD STRENGTHS LIMIT (dB μ V/m)
30 ~ 230	10	30
230 ~ 1000	10	37

Note:(1)The smaller limit shall apply at the combination point between two frequency bands.
 (2)Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the EUT.

5.4.EUT Configuration on Test

The EN 55022 regulations test method must be used to find the maximum emission during radiated emission measurement.

5.5.Operating Condition of EUT

5.5.1.Turn on the power.

5.5.2.After that, let the EUT work in test mode (ON) and measure it.

5.6.Test Procedure

The EUT is placed on a turntable, which is 0.8 meter high above the ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 10 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. By-log antenna is used as a receiving antenna. Both horizontal and vertical polarization of the antenna is set on test.

The bandwidth of the Receiver is set at 120kHz.


The frequency range from 30MHz to 1000MHz is investigated.

5.7.Test Results

PASS.


The test result please refer to the next page.

Model No.	Lii-202	Test Date	Aug 09,2016
Environmental Conditions	24°C, 56% RH	Test Mode	ON
Pol	Vertical	Detector Function	Quasi-peak
Test Engineer	Kano	Distance	10m

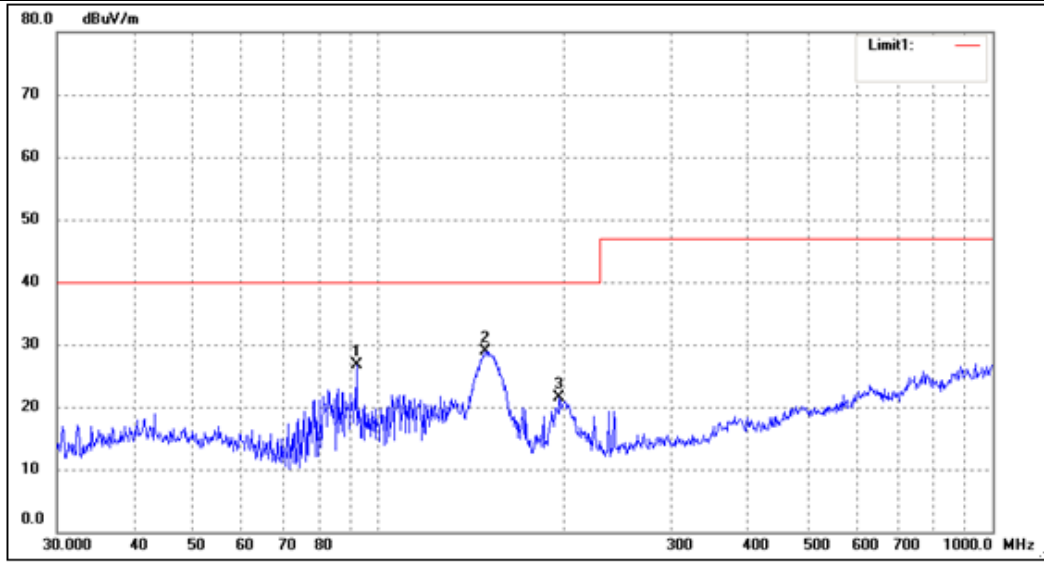

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1.	92.1388.	38.20.	-11.45.	26.75.	40.00.	-13.25.	.	.	peak.
2.	149.4857.	41.45.	-12.53.	28.92.	40.00.	-11.08.	.	.	peak.
3.	197.2001.	33.64.	-12.12.	21.52.	40.00.	-18.48.	.	.	peak.


Model No.	Lii-202	Test Date	Aug 09,2016
Environmental Conditions	24°C, 56% RH	Test Mode	ON
Pol	Horizontal	Detector Function	Quasi-peak
Test Engineer	Kano	Distance	10m

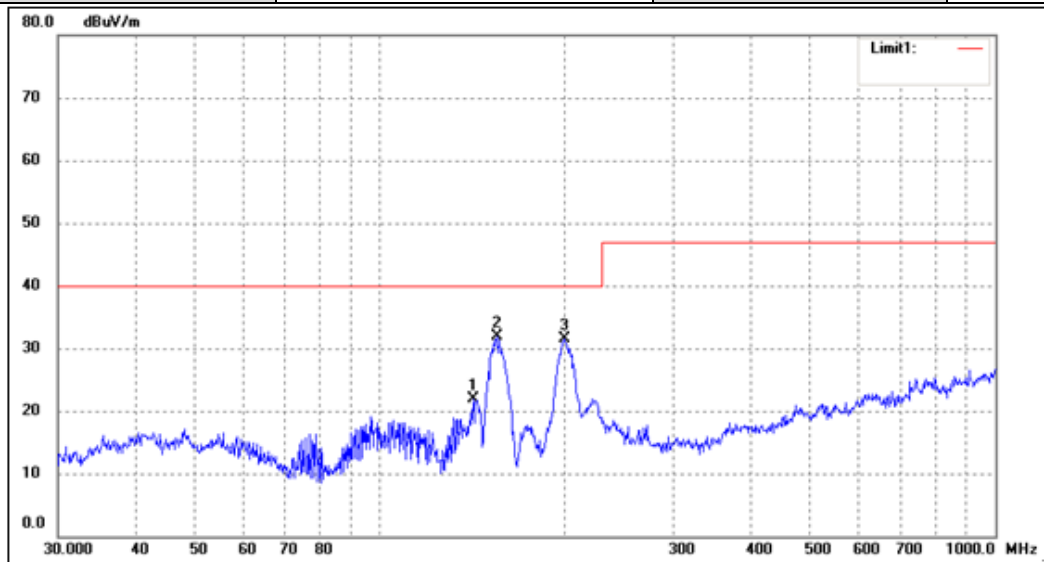

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1.	141.8262.	32.79.	-10.94.	21.85.	40.00.	-18.15.	.	.	peak.
2.	154.8205.	42.90.	-11.03.	31.87.	40.00.	-8.13.	.	.	peak.
3.	199.2855.	39.94.	-8.38.	31.56.	40.00.	-8.44.	.	.	peak.

6. HARMONIC CURRENT EMISSION MEASUREMENT

6.1. Block Diagram of Test Setup

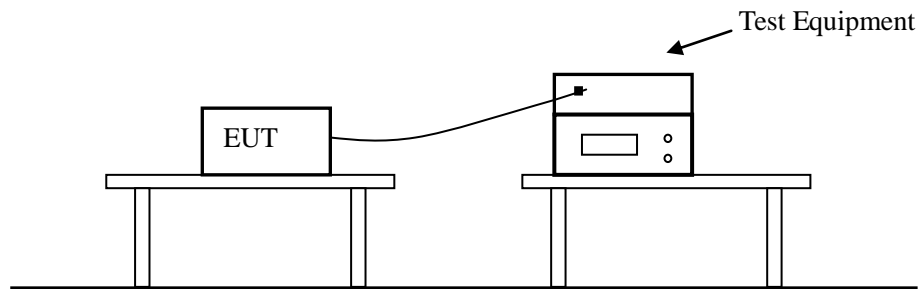

6.2. Test Standard

EN 61000-3-2: 2006+ A1: 2009+A2: 2009

6.3. Operation Condition of EUT

Same as Section 4.4, except the test setup replaced as Section 6.1.


6.4. Test Results

PASS.

Because power of EUT less than 75W, According standard EN 61000-3-2, Harmonic current isn't required.

7. VOLTAGE FLUCTUATION AND FLICKER MEASUREMENT

7.1. Block Diagram of Test Setup

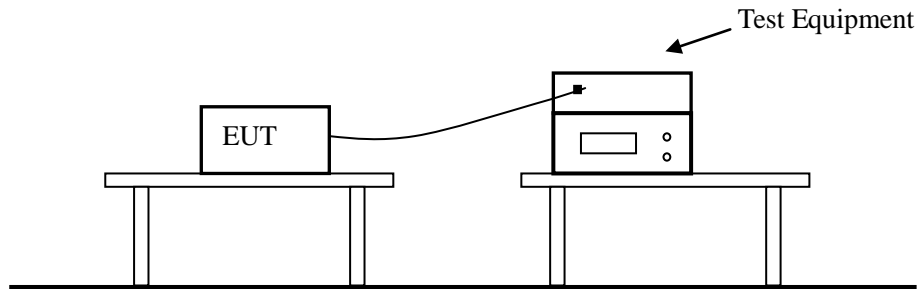

7.2. Measuring Standard

EN 61000-3-3: 2013

7.3. Operation Condition of EUT

Same as Section 4.4, except the test setup replaced as Section 7.1.

7.4. Test Results

PASS.

The test result please refer to the next page.


Model No.	Lii-202	Test Date	Aug 09,2016
Test Engineer	Kano		

Voltech IEC61000-3 Windows Software 1.14.06RC1	
Type of Test:	Flickermeter Test - Table
Power Analyzer:	Voltech PM6000 SN: 200006700523 Firmware Version: v1.21.07RC2
Channel(s):	1. SN: 090015502053, 28 Adjusted Date: 22 JUN 2011. 2. SN:None Adjusted Date:None 3. SN:None Adjusted Date:None 4. SN:None Adjusted Date:None 5. SN:None Adjusted Date:None 6. SN:None Adjusted Date:None
Shunt(s):	1. SN: 091024301916, 4 Adjusted Date: 23 JUN 2011. 2. SN:None Adjusted Date:None 3. SN:None Adjusted Date:None 4. SN:None Adjusted Date:None 5. SN:None Adjusted Date:None 6. SN:None Adjusted Date:None
AC Source:	Mains / Manual Source
Overall Result:	Notes:
PASS	Measurement method - Voltage

	Pst	dc (%)	dmax (%)	d(t) > 3.3%(ms)
Limit	1.000	3.300	4.000	500
Reading 1	0.090	0.009	0.180	0

8. ELECTROSTATIC DISCHARGE IMMUNITY TEST

8.1. Block Diagram of Test Setup

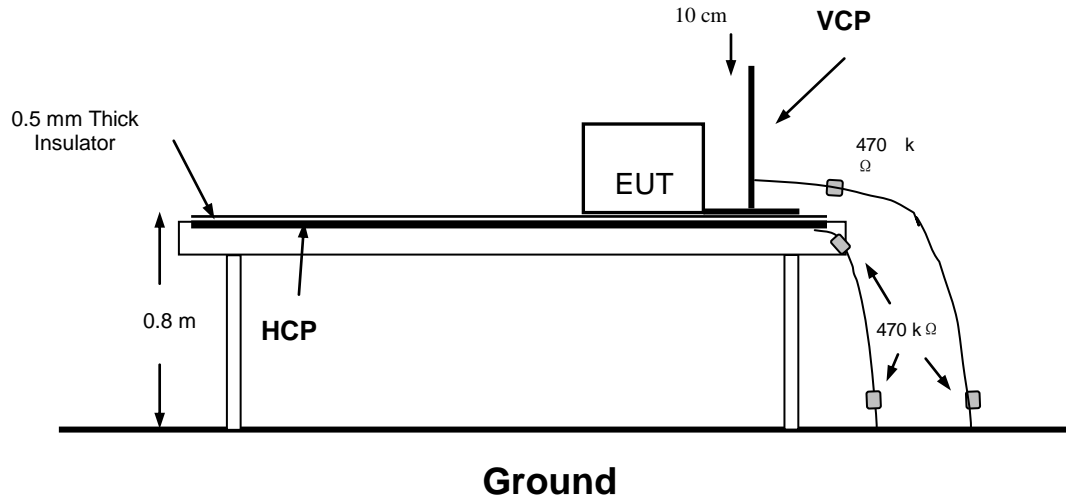

8.2. Test Standard

EN 55024: 2010 (EN 61000-4-2: 2009, Severity Level: 3 / Air Discharge: $\pm 8\text{KV}$, Level: 2 / Contact Discharge: $\pm 4\text{KV}$)

8.3. Severity Levels and Performance Criterion

8.3.1. Severity level

Level	Test Voltage Contact Discharge (KV)	Test Voltage Air Discharge (KV)
1.	± 2	± 2
2.	± 4	± 4
3.	± 6	± 8
4.	± 8	± 15
X	Special	Special

8.3.2. Performance Criterion: B

8.4. EUT Configuration on Test

The configuration of EUT is listed in Section 3.7.

8.5. Operating Condition of EUT

Same as conducted emission measurement, which is listed in Section 4.4. Except the test set up replaced by Section 8.1.

8.6.Test Procedure

8.6.1.Air Discharge

This test is done on a non-conductive surface. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT. After each discharge, the discharge electrode shall be removed from the EUT. The generator is then re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed

8.6.2.Contact Discharge

All the procedure shall be same as Section 8.6.1. Except that the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.

8.6.3.Indirect Discharge For Horizontal Coupling Plane

At least 10 single discharges (in the most sensitive polarity) shall be applied at the front edge of each HCP opposite the center point of each unit (if applicable) of the EUT and 0.1m from the front of the EUT. The long axis of the discharge electrode shall be in the plane of the HCP and perpendicular to its front edge during the discharge.

8.6.4.Indirect Discharge For Vertical Coupling Plane

At least 10 single discharge (in the most sensitive polarity) shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

8.7.Test Results

PASS.

Please refer to the following pages

Electrostatic Discharger Test Results

Standard	<input type="checkbox"/> IEC 61000-4-2 <input checked="" type="checkbox"/> EN 61000-4-2		
Applicant	Shenzhen XinShengLi Power Co.,LTD.		
EUT	Battery Charger	Temperature	24℃
M/N	Lii-202	Humidity	53%
Criterion	B	Pressure	1021mbar
Test Mode	ON	Test Date	Aug 09,2016
Test Engineer	Kano		

Air Discharge

Test Points	Test Levels			Results		
	± 2KV	± 4KV	± 8KV	Passed	Fail	Performance Criterion
Front	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Back	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Left	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Right	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Top	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Bottom	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B

Contact Discharge

Test Points	Test Levels		Results		
	± 2 kV	±4 kV	Passed	Fail	Performance Criterion
Front	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Back	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Left	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Right	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Top	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Bottom	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B

Discharge To Horizontal Coupling Plane


Side of EUT	Test Levels		Results		
	± 2 kV	± 4 kV	Passed	Fail	Performance Criterion
Front	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Back	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Left	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Right	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B

Discharge To Vertical Coupling Plane

Side of EUT	Test Levels		Results		
	± 2 kV	± 4 kV	Passed	Fail	Performance Criterion
Front	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Back	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Left	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Right	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B

9. RF FIELD STRENGTH SUSCEPTIBILITY TEST

9.1. Block Diagram of Test

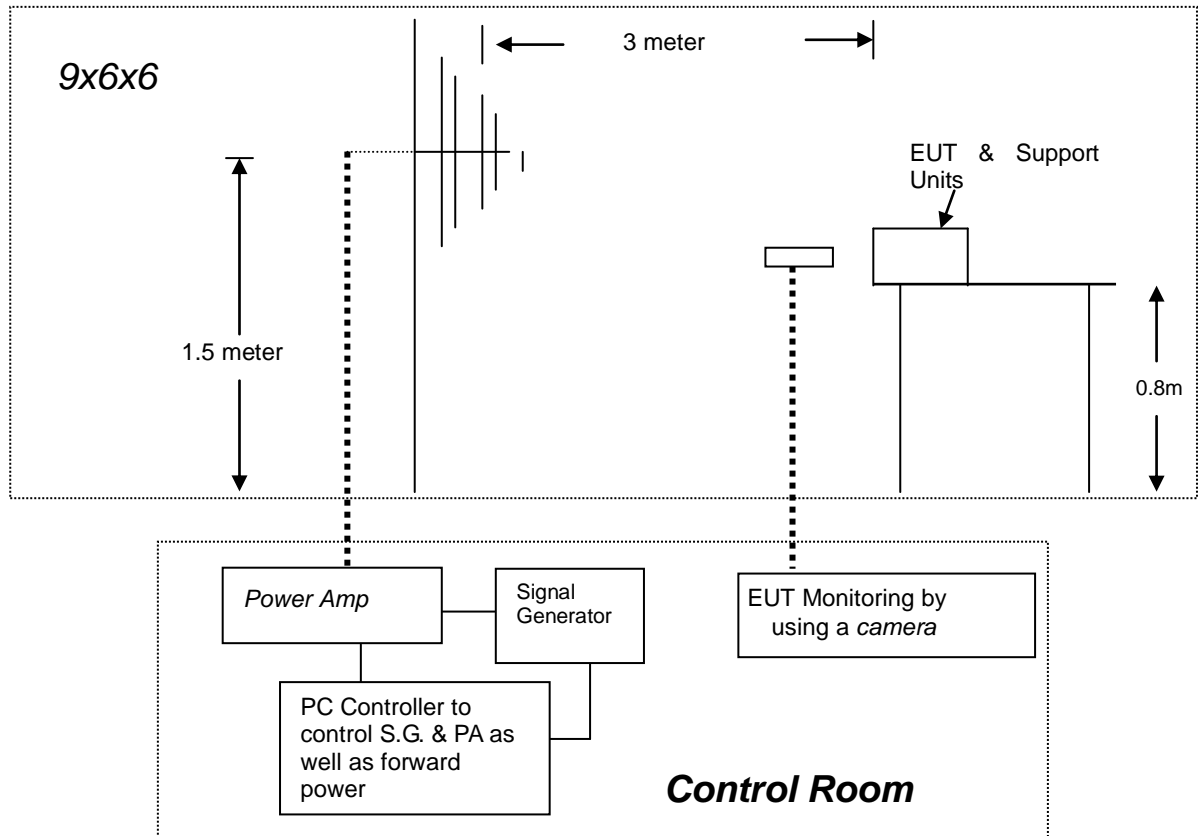

9.2. Test Standard

EN 55024: 2010 (EN 61000-4-3: 2006+A2: 2010 Severity Level: 2, 3V / m)

9.3. Severity Levels and Performance Criterion

9.3.1. Severity Levels

Level	Field Strength (V/m)
1.	1
2.	3
3.	10
X.	Special

9.3.2. Performance Criterion: A

9.4.EUT Configuration on Test

The configuration of the EUT is same as Section 3.8.

9.5.Operating Condition of EUT

Same as radiated emission measurement, which is listed in Section 4.4, except the test setup replaced as Section 9.1.

9.6.Test Procedure

The EUT are placed on a table, which is 0.8 meter high above the ground. The EUT is set 3 meters away from the transmitting antenna, which is mounted on an antenna tower. Both horizontal and vertical polarization of the antenna is set on test. Each of the four sides of the EUT must be faced this transmitting antenna and measured individually. In order to judge the EUT performance, a CCD Recording is used to monitor its screen. All the scanning conditions are as following:

Condition of Test	Remark
-----	-----
1. Fielded Strength	3V/m (Severity Level 2)
2. Radiated Signal	Unmodulated
3. Scanning Frequency	80-1000MHz
4. Sweep time of radiated	0.0015 Decade/s
5. Dwell Time	3 Sec.

9.7.Test Results

PASS.

Please refer to the following page.

RF Field Strength Susceptibility Test Results

Standard	<input type="checkbox"/> IEC 61000-4-3 <input checked="" type="checkbox"/> EN 61000-4-3		
Applicant	Shenzhen XinShengLi Power Co.,LTD.		
EUT	Battery Charger	Temperature	24°C
M/N	Lii-202	Humidity	53%
Field Strength	3 V/m	Criterion	A
Test Mode	ON	Test Engineer	Kano
Frequency Range	80 MHz to 1000 MHz	Test Date	Aug 09,2016
Modulation	<input type="checkbox"/> None <input type="checkbox"/> Pulse <input checked="" type="checkbox"/> AM 1KHz 80%		
Steps	1%		

	Horizontal	Vertical
Front	PASS	PASS
Right	PASS	PASS
Rear	PASS	PASS
Left	PASS	PASS


Test Equipment:

1. Signal Generator: 2031 (MARCONI)
2. Power Amplifier: 500A100 & 100W/1000M1 (A&R)
3. Power Antenna: 3108 (EMCO) & AT1080 (A&R)
4. Field Monitor: FM2000 (A&R)

Note:

10. ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST

10.1. Block Diagram of Test Setup

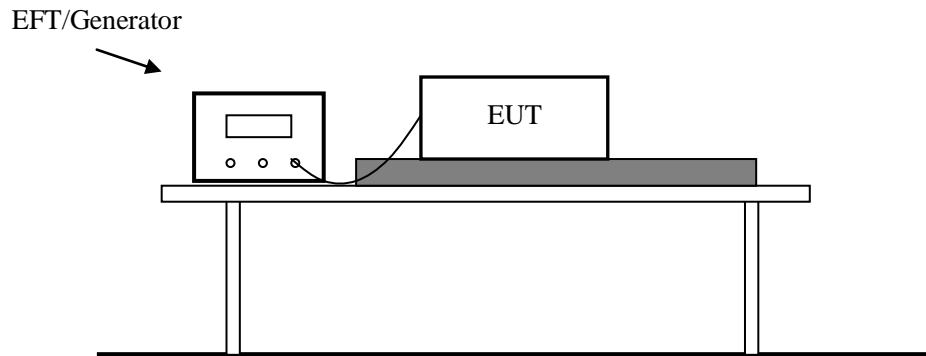

10.2. Test Standard

EN 55024: 2010 (EN 61000-4-4: 2004+A1: 2010, Severity Level, Level 2: 1KV)

10.3. Severity Levels and Performance Criterion

10.3.1. Severity level

Open Circuit Output Test Voltage $\pm 10\%$		
Level	On Power Supply Lines	On I/O (Input/Output) Signal data and control lines
1.	0.5 KV	0.25 KV
2.	1 KV	0.5 KV
3.	2 KV	1 KV
4.	4 KV	2 KV
X	Special	Special

10.3.2. Performance Criterion: B

10.4. EUT Configuration on Test

The configuration of EUT is listed in Section 3.9.

10.5. Operating Condition of EUT

10.5.1. Setup the EUT as shown in Section 10.1.

10.5.2. Turn on the power of all equipments.

10.5.3. Let the EUT work in test mode (ON) and measure it.

10.6.Test Procedure

The EUT is put on the table, which is 0.8 meter high above the ground. This reference ground plane shall project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane beneath the EUT, shall be more than 0.5m.

10.6.1.For input and output AC power ports:

The EUT is connected to the power mains by using a coupling device, which couples the EFT interference signal to AC power lines. Both polarities of the test voltage should be applied during compliance test and the duration of the test is 2 mins.

10.6.2.For signal lines and control lines ports: No I/O ports. It's unnecessary to test.

10.6.3.For DC output line ports: It's unnecessary to test.

10.7.Test Results

PASS.

Please refer to the following page.

Electrical Fast Transient/Burst Test Results


Standard	<input type="checkbox"/> IEC 61000-4-4 <input checked="" type="checkbox"/> EN 61000-4-4		
Applicant	Shenzhen XinShengLi Power Co.,LTD.		
EUT	Battery Charger	Temperature	24℃
M/N	Lii-202	Humidity	53%
Test Mode	ON	Criterion	B
Test Engineer	Kano	Test Date	Aug 09,2016

Line	Test Voltage	Result (+)	Result (-)
L	1KV	PASS	PASS
N	1KV	PASS	PASS
PE			
L-N	1KV	PASS	PASS
L-PE			
N-PE			
L-N-PE			
Signal Line			
I/O Cable			

Note:

11. SURGE IMMUNITY TEST

11.1. Block Diagram of Test Setup

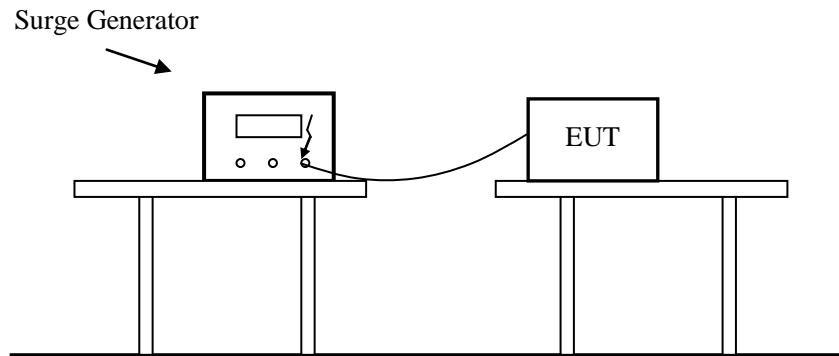

11.2. Test Standard

EN 55024: 2010 (EN 61000-4-5: 2006, Severity Level: Line to Line: Level 2, 1.0KV, Line to Earth: Level 3, 2.0KV)

11.3. Severity Levels and Performance Criterion

11.3.1. Severity level

Severity Level	Open-Circuit Test Voltage (KV)
1	0.5
2	1.0
3	2.0
4	4.0
*	Special

11.3.2. Performance Criterion: B

11.4. EUT Configuration on Test

The configuration of EUT is listed in Section 3.10.

11.5. Operating Condition of EUT

11.5.1. Setup the EUT as shown in Section 11.1.

11.5.2. Turn on the power of all equipments.

11.5.3. Let the EUT work in test mode (ON) and measure it.

11.6.Test Procedure

- 11.6.1.Set up the EUT and test generator as shown on Section 11.1.
- 11.6.2.For line to line coupling mode, provide a 1.0 KV 1.2/50us voltage surge (at open-circuit condition) and 8/20us current surge to EUT selected points.
- 11.6.3.At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are conducted during test.
- 11.6.4.Different phase angles are done individually.
- 11.6.5.Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.

11.7.Test Results

PASS.

Please refer to the following page.


Surge Immunity Test Result

Standard	<input type="checkbox"/> IEC 61000-4-5 <input checked="" type="checkbox"/> EN 61000-4-5		
Applicant	Shenzhen XinShengLi Power Co.,LTD.		
EUT	Battery Charger	Temperature	24°C
M/N	Lii-202	Humidity	53%
Test Mode	ON	Criterion	B
Test Engineer	Kano	Test Date	Aug 09,2016

Location	Polarity	Phase Angle	Number of Pulse	Pulse Voltage (KV)	Result
L-N	+	0°	5	1.0	PASS
	+	90°	5	1.0	PASS
	+	180°	5	1.0	PASS
	+	270°	5	1.0	PASS
	-	0°	5	1.0	PASS
	-	90°	5	1.0	PASS
	-	180°	5	1.0	PASS
	-	270°	5	1.0	PASS
L-PE					
N-PE					
Signal Line					
Note					

12. INJECTED CURRENTS SUSCEPTIBILITY TEST

12.1. Block Diagram of Test Setup

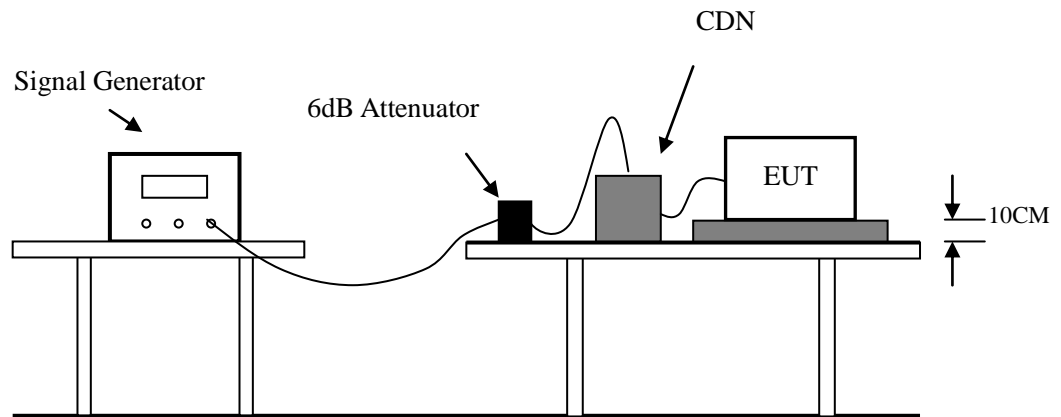

12.2. Test Standard

EN 55024: 2010(EN 61000-4-6: 2009, Severity Level: Level 2, 3V (rms), (0.15MHz ~ 80MHz))

12.3. Severity Levels and Performance Criterion

12.3.1. Severity level

Level	Field Strength (V)
1	1
2	3
3	10
X	Special

12.3.2. Performance Criterion: A

12.4. EUT Configuration on Test

The configuration of EUT is listed in Section 3.11.

12.5. Operating Condition of EUT

12.5.1. Setup the EUT as shown in Section 12.1.

12.5.2. Turn on the power of all equipments.

12.5.3. Let the EUT work in test mode (ON) and measure it.

12.6.Test Procedure

- 12.6.1.Set up the EUT, CDN and test generators as shown on Section 12.1.
- 12.6.2.Let the EUT work in test mode and measure it.
- 12.6.3.The EUT are placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible).
- 12.6.4.The disturbance signal described below is injected to EUT through CDN.
- 12.6.5.The EUT operates within its operational mode(s) under intended climatic conditions after power on.
- 12.6.6.The frequency range is swept from 150kHz to80MHz using 3V signal level, and with the disturbance signal 80% amplitude modulated with a 1kHz sine wave.
- 12.6.7.The rate of sweep shall not exceed 1.5×10^{-3} decades/s. where the frequency is swept incrementally; the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.
- 12.6.8.Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.

12.7.Test Results

PASS.

Please refer to the following page.

Injected Currents Susceptibility Test Results

Standard	<input type="checkbox"/> IEC 61000-4-6 <input checked="" type="checkbox"/> EN 61000-4-6		
Applicant	Shenzhen XinShengLi Power Co.,LTD.		
EUT	Battery Charger	Temperature	24℃
M/N	Lii-202	Humidity	53%
Test Mode	ON	Criterion	A
Test Engineer	Kano	Test Date	Aug 09,2016

Frequency Range (MHz)	Injected Position	Strength (Unmodulated)	Criterion	Result
0.15 ~ 80	AC Mains	3V	A	PASS


Remark:

1. Modulation Signal:1kHz 80% AM
2. Measurement Equipment :
 - Simulator: CIT-10 (FRANKONIA)
 - CDN : CDN-M2 (FRANKONIA)
 - CDN-M3 (FRANKONIA)

Note:

13. MAGNETIC FIELD SUSCEPTIBILITY TEST

13.1. Block Diagram of Test Setup

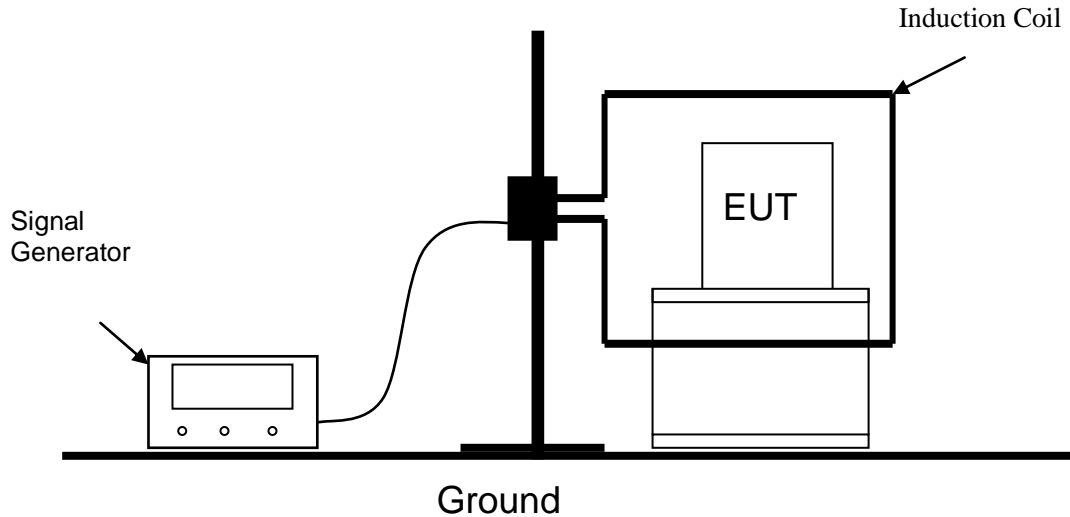

13.2. Test Standard

EN 55024: 2010 (EN 61000-4-8: 2010, Severity Level: Level 1, 1A / m)

13.3. Severity Levels and Performance Criterion

13.3.1. Severity Levels

Level	Field Strength (A/m)
1	1
2	3
3	10
4	30
5	100
X	Special

13.3.2. Performance Criterion: A

13.4. EUT Configuration on Test

The configuration of the EUT is same as Section 3.12.

13.5.Test Procedure

The EUT is placed in the middle of a induction coil (1*1m), under which is a 1*1*0.1m (high) table, this small table is also placed on a larger table, 0.8 m above the ground. Both horizontal and vertical polarization of the induction coil is set on test, so that each side of the EUT is affected by the magnetic field. Also can reach the same aim by change the position of the EUT.

13.6.Test Results

PASS.

Please refer to the following page.

Magnetic Field Immunity Test Result


Standard	<input type="checkbox"/> IEC 61000-4-8 <input checked="" type="checkbox"/> EN 61000-4-8		
Applicant	Shenzhen XinShengLi Power Co.,LTD.		
EUT	Battery Charger	Temperature	24°C
M/N	Lii-202	Humidity	53%
Test Mode	ON	Criterion	A
Test Engineer	Kano	Test Date	Aug 09,2016

Test Level (A/M)	Testing Duration	Coil Orientation	Criterion	Result
1	5 mins	X	A	PASS
1	5 mins	Y	A	PASS
1	5 mins	Z	A	PASS

Note:

14. VOLTAGE DIPS AND INTERRUPTIONS TEST

14.1. Block Diagram of Test Setup

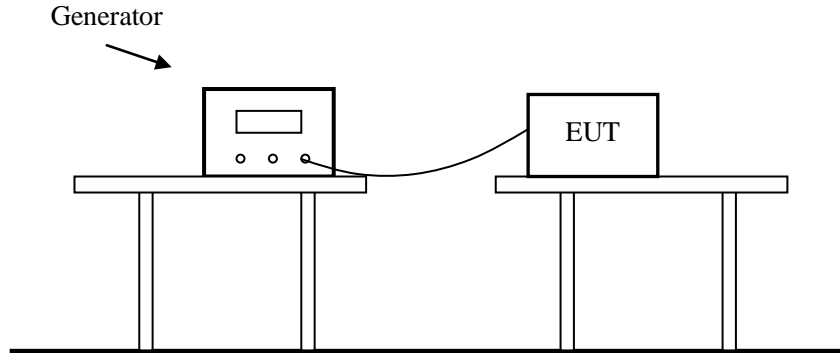

14.2. Test Standard

EN 55024: 2010 (EN 61000-4-11: 2004)

14.3. Severity Levels and Performance Criterion

14.3.1. Severity level

Test Level (% UT)	Voltage dip and short interruptions (% UT)	Duration (in period)
0	100	0.5
70	30	25
0	100	250

14.3.2. Performance Criterion: B&C

14.4. EUT Configuration on Test

The configuration of EUT is listed in Section 3.13&3.14.

14.5. Operating Condition of EUT

14.5.1. Setup the EUT as shown in Section 14.1.

14.5.2. Turn on the power of all equipments.

14.5.3. Let the EUT work in test mode (ON) and measure it.

14.6.Test Procedure

14.6.1.Set up the EUT and test generator as shown on Section 14.1.

14.6.2.The interruptions are introduced at selected phase angles with specified duration.

14.6.3.Record any degradation of performance.

14.7.Test Results

PASS.

Please refer to the following page.

Voltage Dips And Interruptions Test Results

Standard	<input type="checkbox"/> IEC 61000-4-11 <input checked="" type="checkbox"/> EN 61000-4-11		
Applicant	Shenzhen XinShengLi Power Co.,LTD.		
EUT	Battery Charger	Temperature	24°C
M/N	Lii-202	Humidity	53%
Test Mode	ON	Criterion	B&C
Test Engineer	Kano	Test Date	Aug 09,2016

Test Level % U _T	Voltage Dips & Short Interruptions % U _T	Duration (in periods)	Criterion	Result
0	100	0.5P	B	PASS
70	30	25P	C	PASS
0	100	250P	C	PASS

Note:

15. PHOTOGRAPH

15.1.Photo of Radiated Measurement



16. EXTERNAL AND INTERNAL PHOTOS OF THE EUT

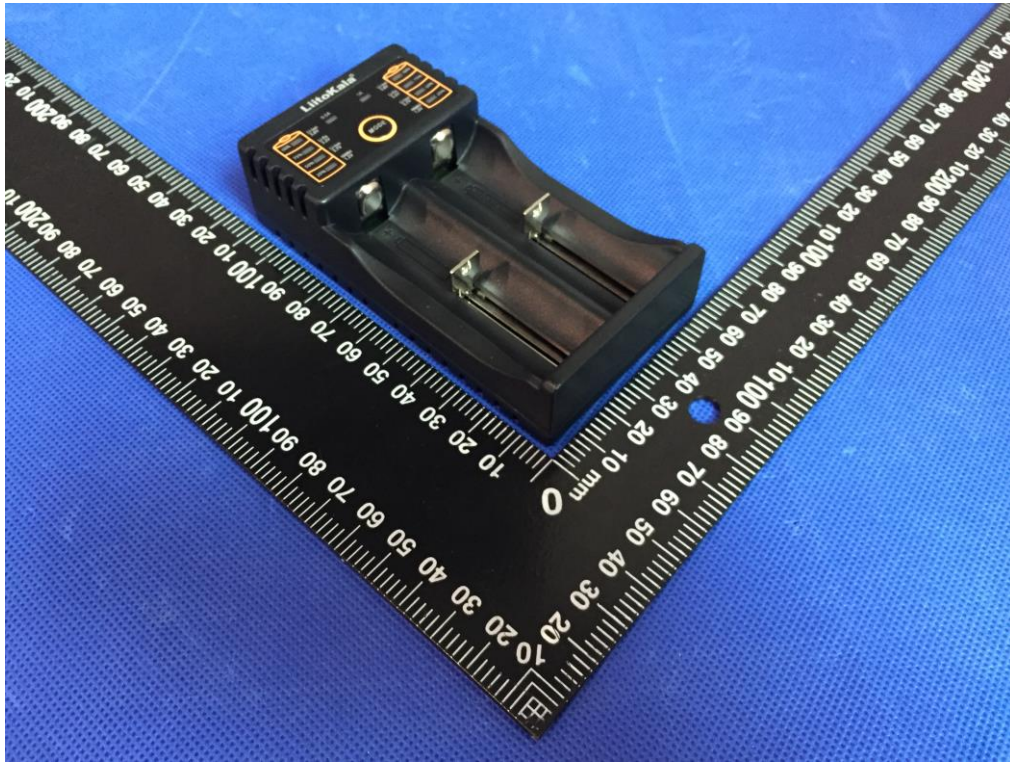


Fig. 1

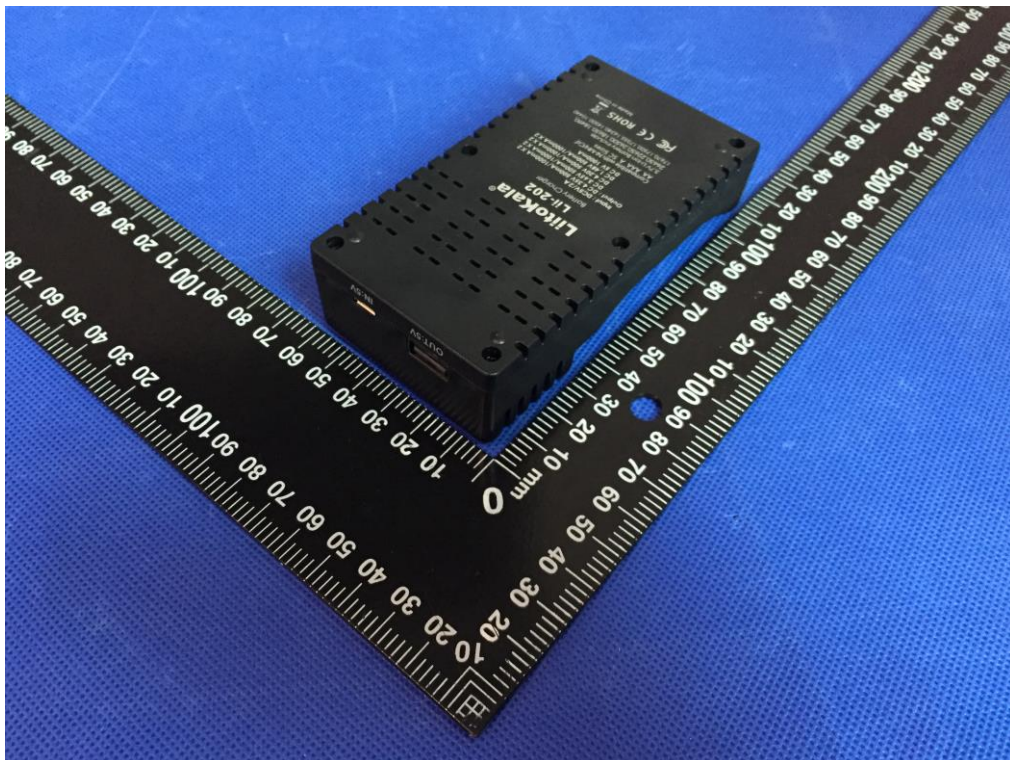


Fig. 2

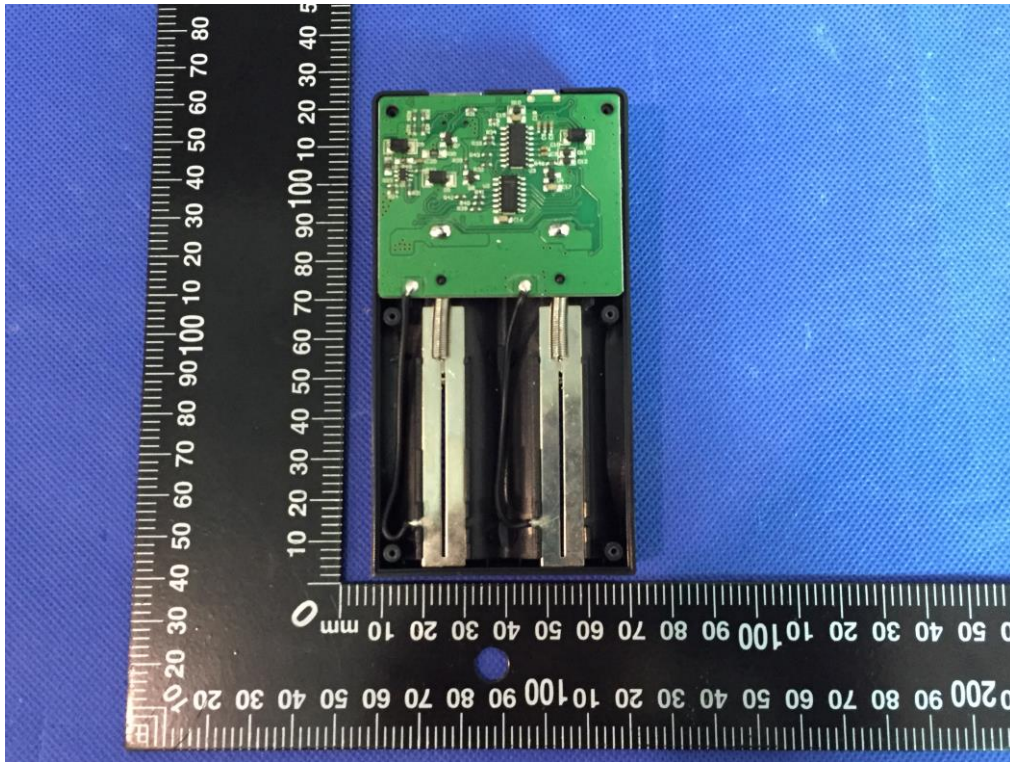


Fig. 3

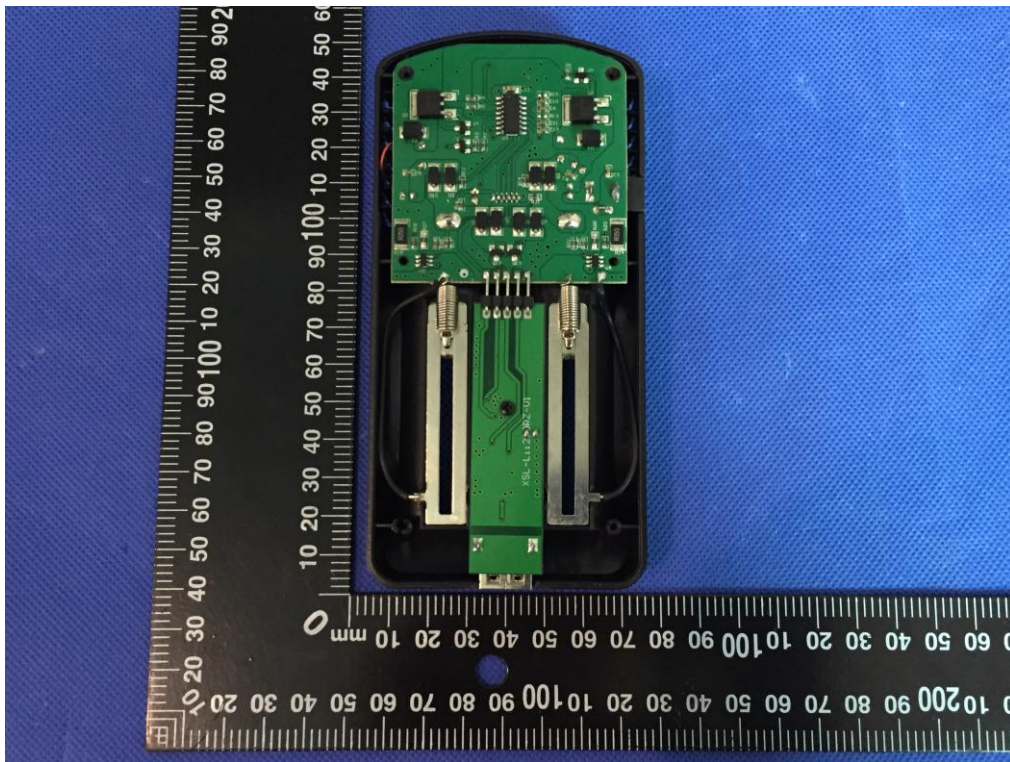


Fig. 4

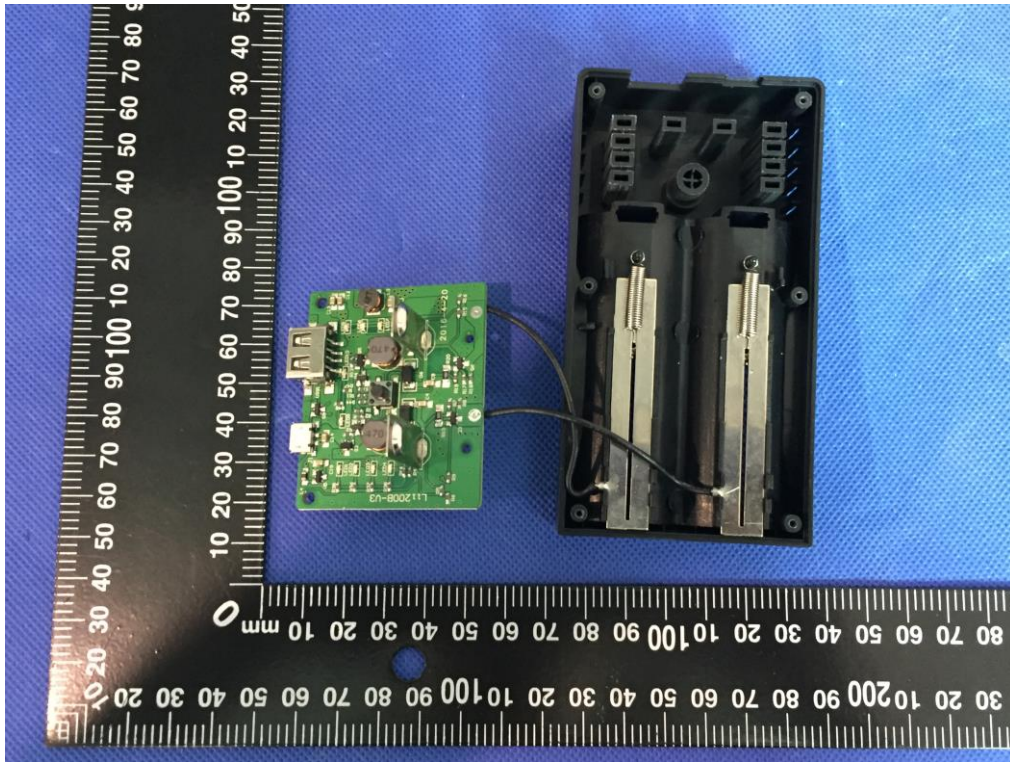


Fig. 5

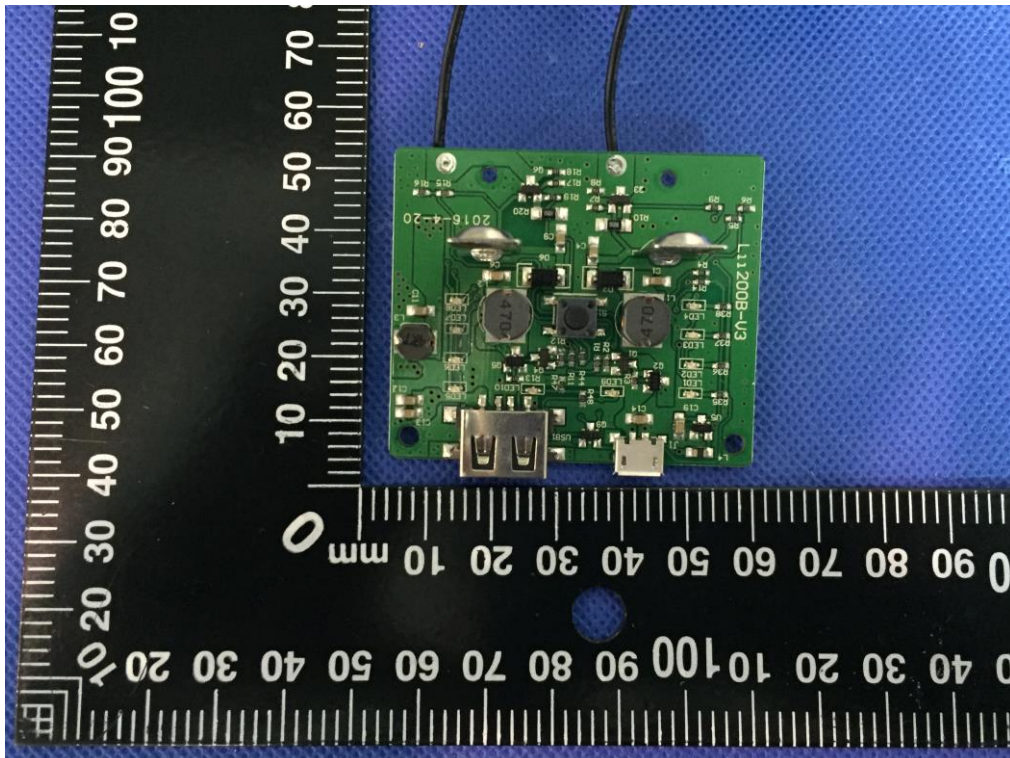


Fig. 6

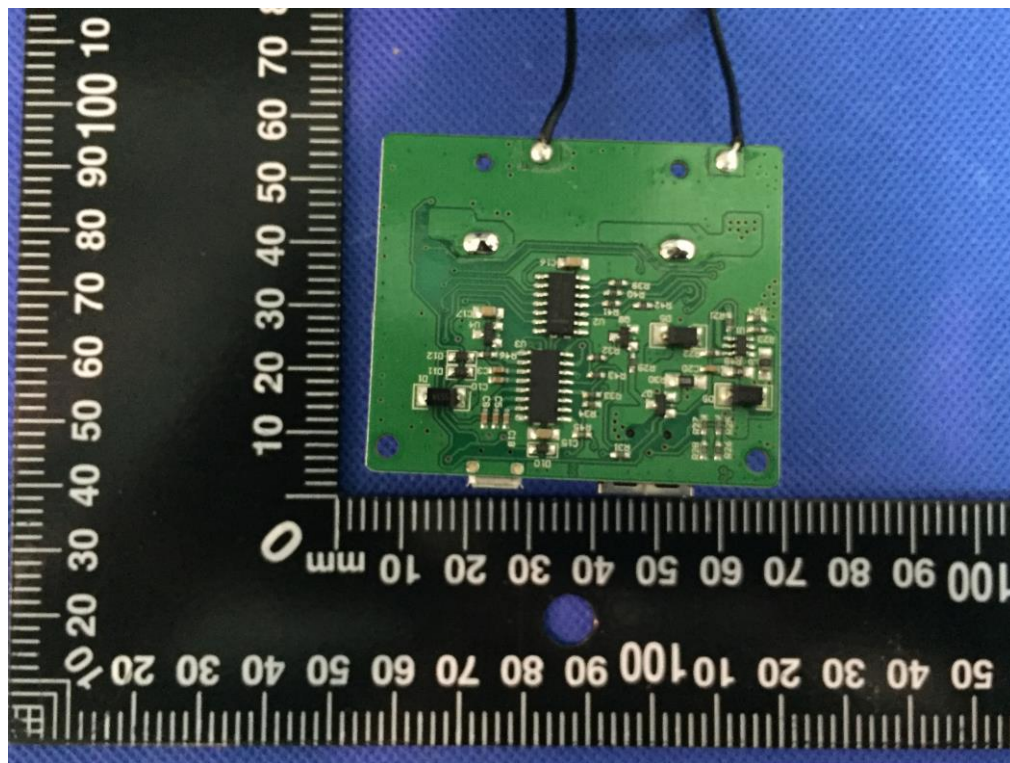


Fig. 7

17. MANUFACTURER/ APPROVAL HOLDER DECLARATION

The following identical model(s):

Lii-201	C20	--	--
---------	-----	----	----

Belong to the tested device:

Product description : Battery Charger
Model name : Lii-202

Remark: no additional models were tested.

-----THE END OF REPORT-----